

# SCROLLSAW WORKSHOP

WWW.SCROLLSAWWORKSHOP.BLOGSPOT.COM

## Digital Patterns

Designed by Steve Good




Hundreds of free Patterns  
Stencil Printer  
Jigsaw Puzzle Templates  
DVD's  
Key Chain Pattern Printer  
Video Tutorials  
Reviews  
Community Forum and more.

Click to Donate.



Scan to Donate

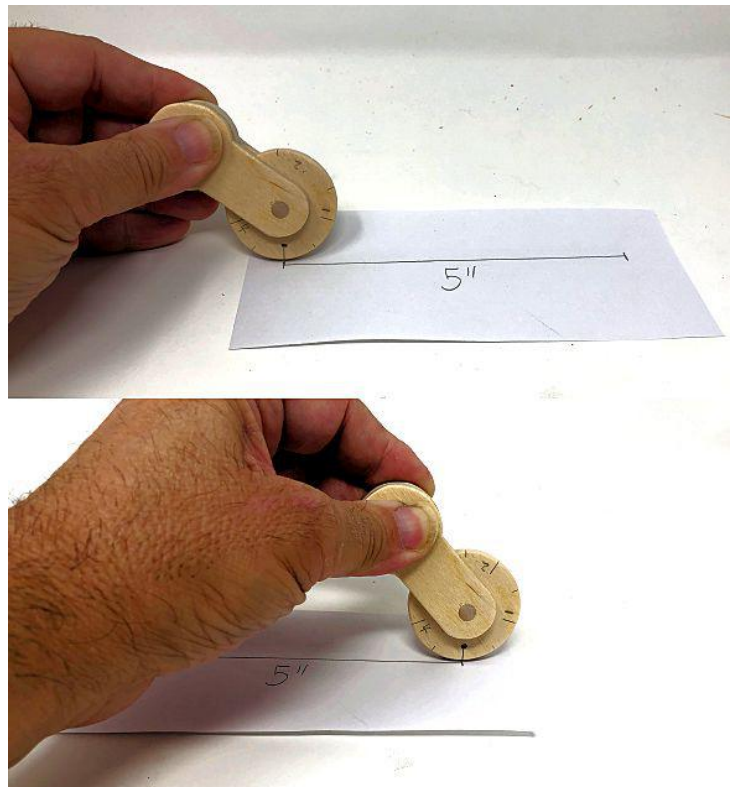

Note to commercial print employees: I give my permission to print as many of this pattern book as your customer requires.

steve@stevedgood.com

Copyright Steve Good 2020



## General Pattern Information

You may use this pattern to make as many of the project as you like. You are free to use any technique including mass production to build the project. The pattern may be copied and given to others provided the entire book is kept intact. You may not sell the pattern or include it in another commercial package of any type.

Steve Good retains the right to the pattern. If you have any questions about the use of this pattern please contact me at [steve@stevedgood.com](mailto:steve@stevedgood.com)

When printing this pattern it is important to print it full size. When you bring up the print dialog box look in the “Page Sizing & Handling” section. Make sure the “Actual Size” is selected before you hit print.



You also only need to print the page/s you need. After the print dialog opens look for the “Pages to Print” section. You can print the current page or a range of pages. This will help save ink by not printing the title/instruction pages.

## Printing Instructions






## Rolling measuring tool

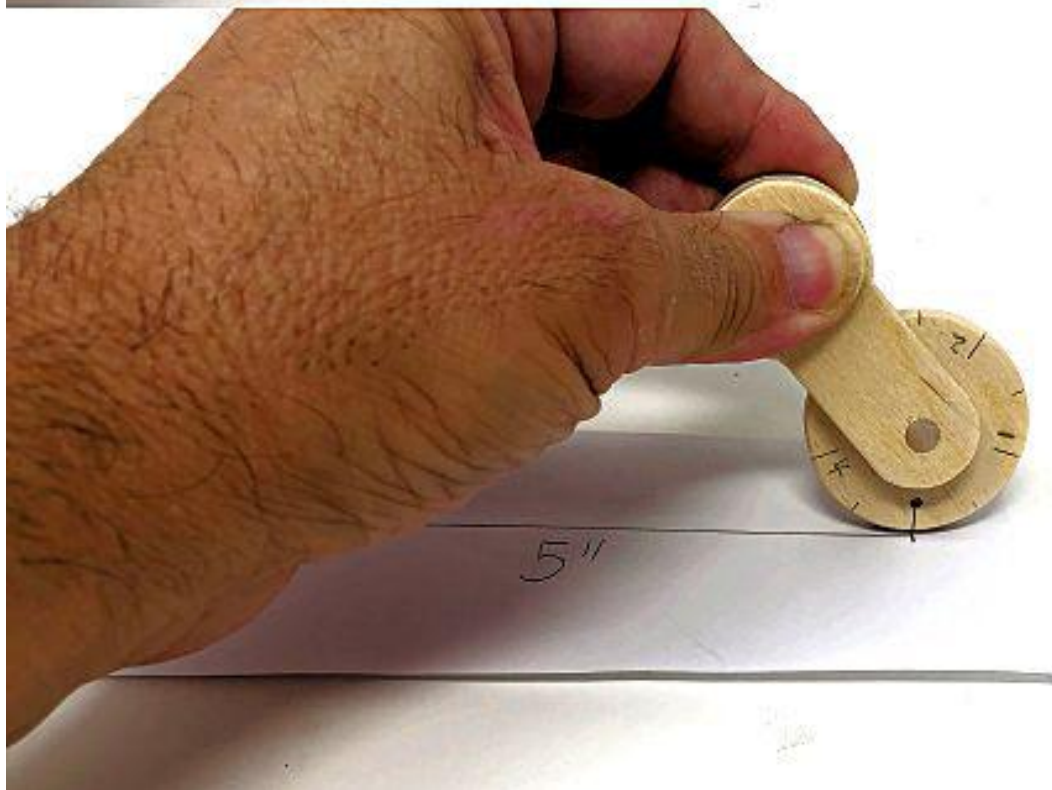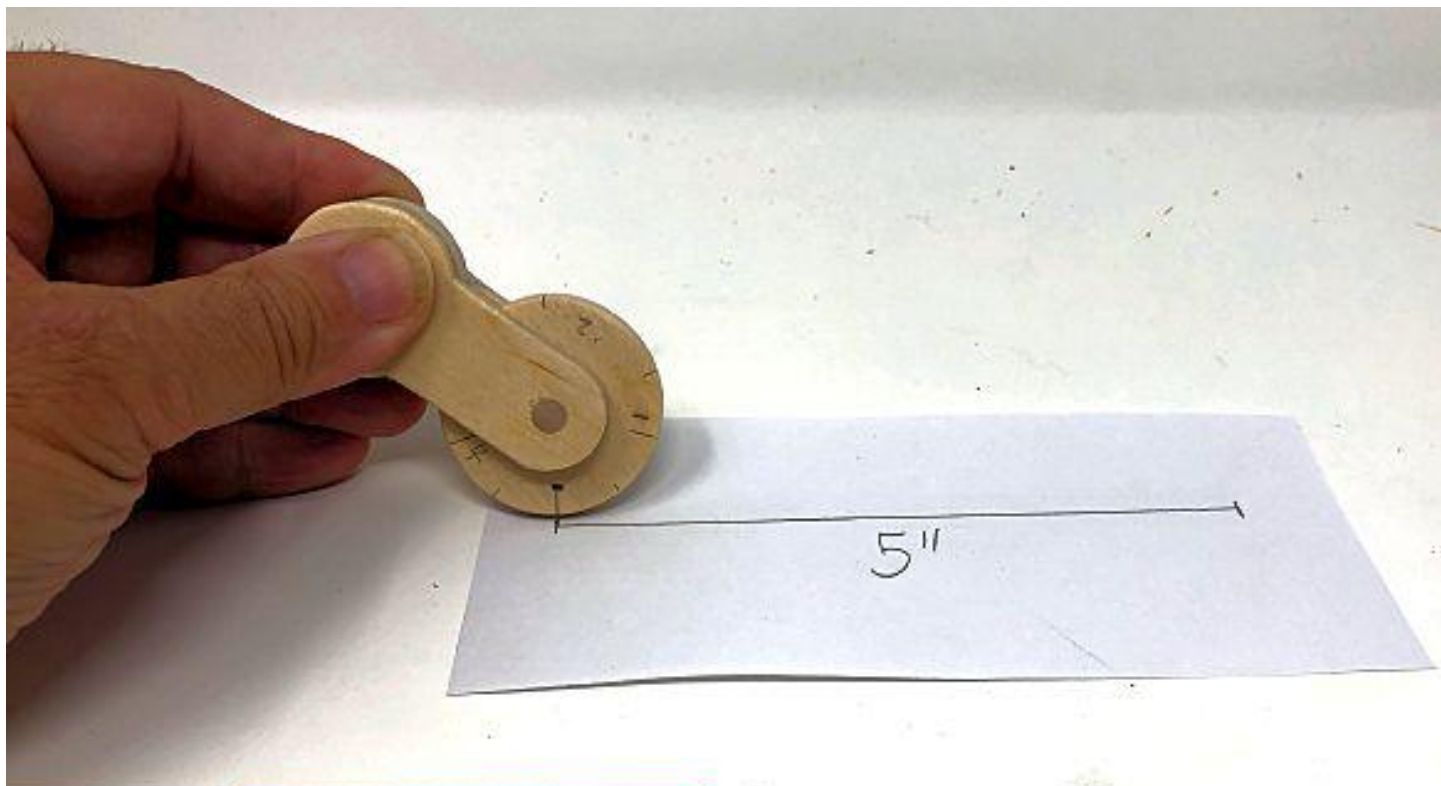

VIDEO DEMONSTRATION LINK



Cut just outside the pattern line.  
Take the roller to the disk sander and carefully  
sand to the line.

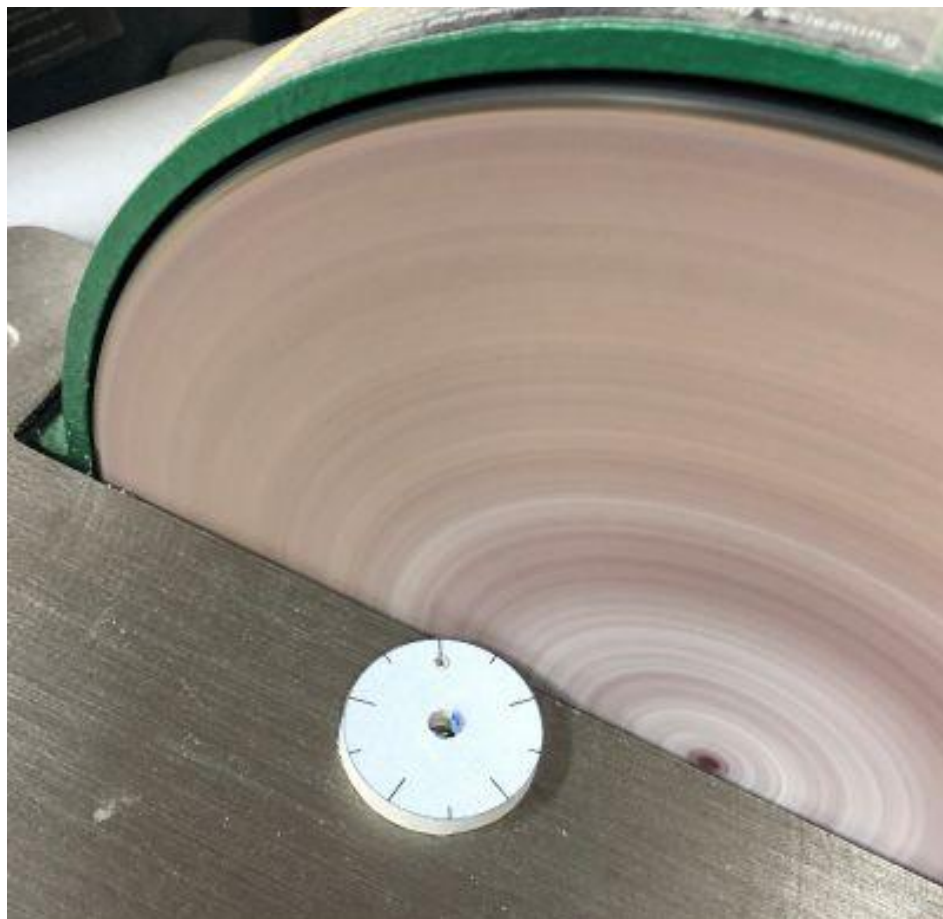



Take the roller and do a calibration measurement.  
If the test is not accurate go back to the disk sander  
and make the disk slightly smaller. Repeat this until  
it is as accurate as possible.



Be careful not to get the roller too small when sanding.  
If you over shoot then cut another roller and repeat  
the calibration.



Since all the parts are 1/4" thick you may need to slightly sand the roller thinner so it rotates easily.

The hole in the center of the roller is a bit larger than the 1/4" dowel. This lets the roller roll without binding. As you glue the parts together, check to make sure nothing is in a bind.






Clamp and let the glue cure. Check for binding at this point also before the glue cures.



1/4" Thick

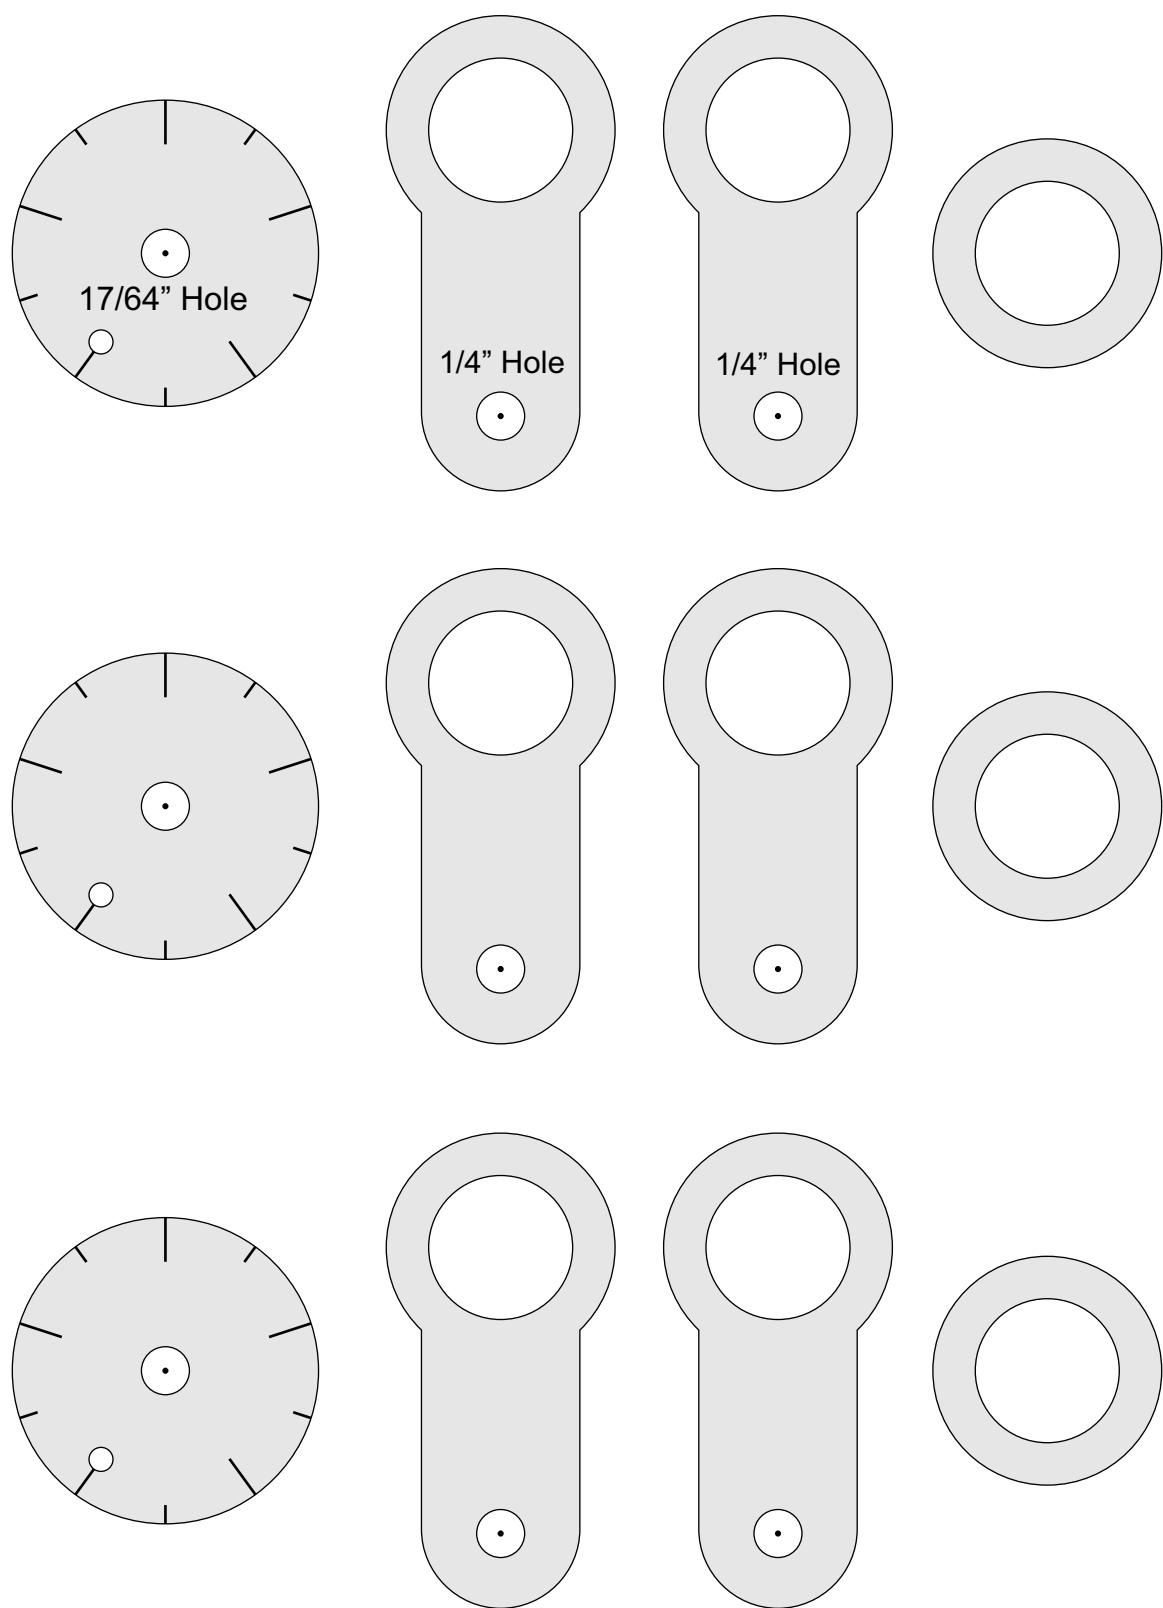

The axle dowel should be 3.4" long and 1/4" diameter.