

SCROLLSAW WORKSHOP

WWW.SCROLLSAWWORKSHOP.BLOGSPOT.COM

Digital Patterns

Designed by Steve Good



Hundreds of free Patterns
Stencil Printer
Jigsaw Puzzle Templates
DVD's
Key Chain Pattern Printer
Video Tutorials
Reviews
Community Forum and more.

If you would like
to donate click
here. No Paypal
account needed.



Note to commercial print employees: I give my permission to print as many of this pattern book as your customer requires.

steve@stevedgood.com

Copyright Steve Good 2018



General Pattern Information

You may use this pattern to make as many of the project as you like. You are free to use any technique including mass production to build the project. The pattern may be copied and given to others provided the entire book is kept intact. You may not sell the pattern or include it in another commercial package of any type.

Steve Good retains the right to the pattern. If you have any questions about the use of this pattern please contact me at steve@stevedgood.com

When printing this pattern it is important to print it full size. When you bring up the print dialog box look in the “Page Sizing & Handling” section. Make sure the “Actual Size” is selected before you hit print.

You also only need to print the page/s you need. After the print dialog opens look for the “Pages to Print” section. You can print the current page or a range of pages. This will help save ink by not printing the title/instruction pages.

Printing Instructions



Six foot fence welcome sign.



Purchase two six foot pressure treated dog ear picket fence pieces. These need to be 5.5 inches wide. screw them together using slats across the back. Paint and nail the letters to the pickets.



When you visit the hardware store look for the straightest pickets you can find.
Nail screw slats across the back leaving a small space between the pickets.






Cut the letters and ornamentation on the scroll saw.
Paint the letters with an exterior rated paint.

I applied the letters using hot glue to hold
the letters in place. I then used brad nails from the back
for a permanent connection.

3/4" Thick for all parts.

Paint with exterior grade paint.

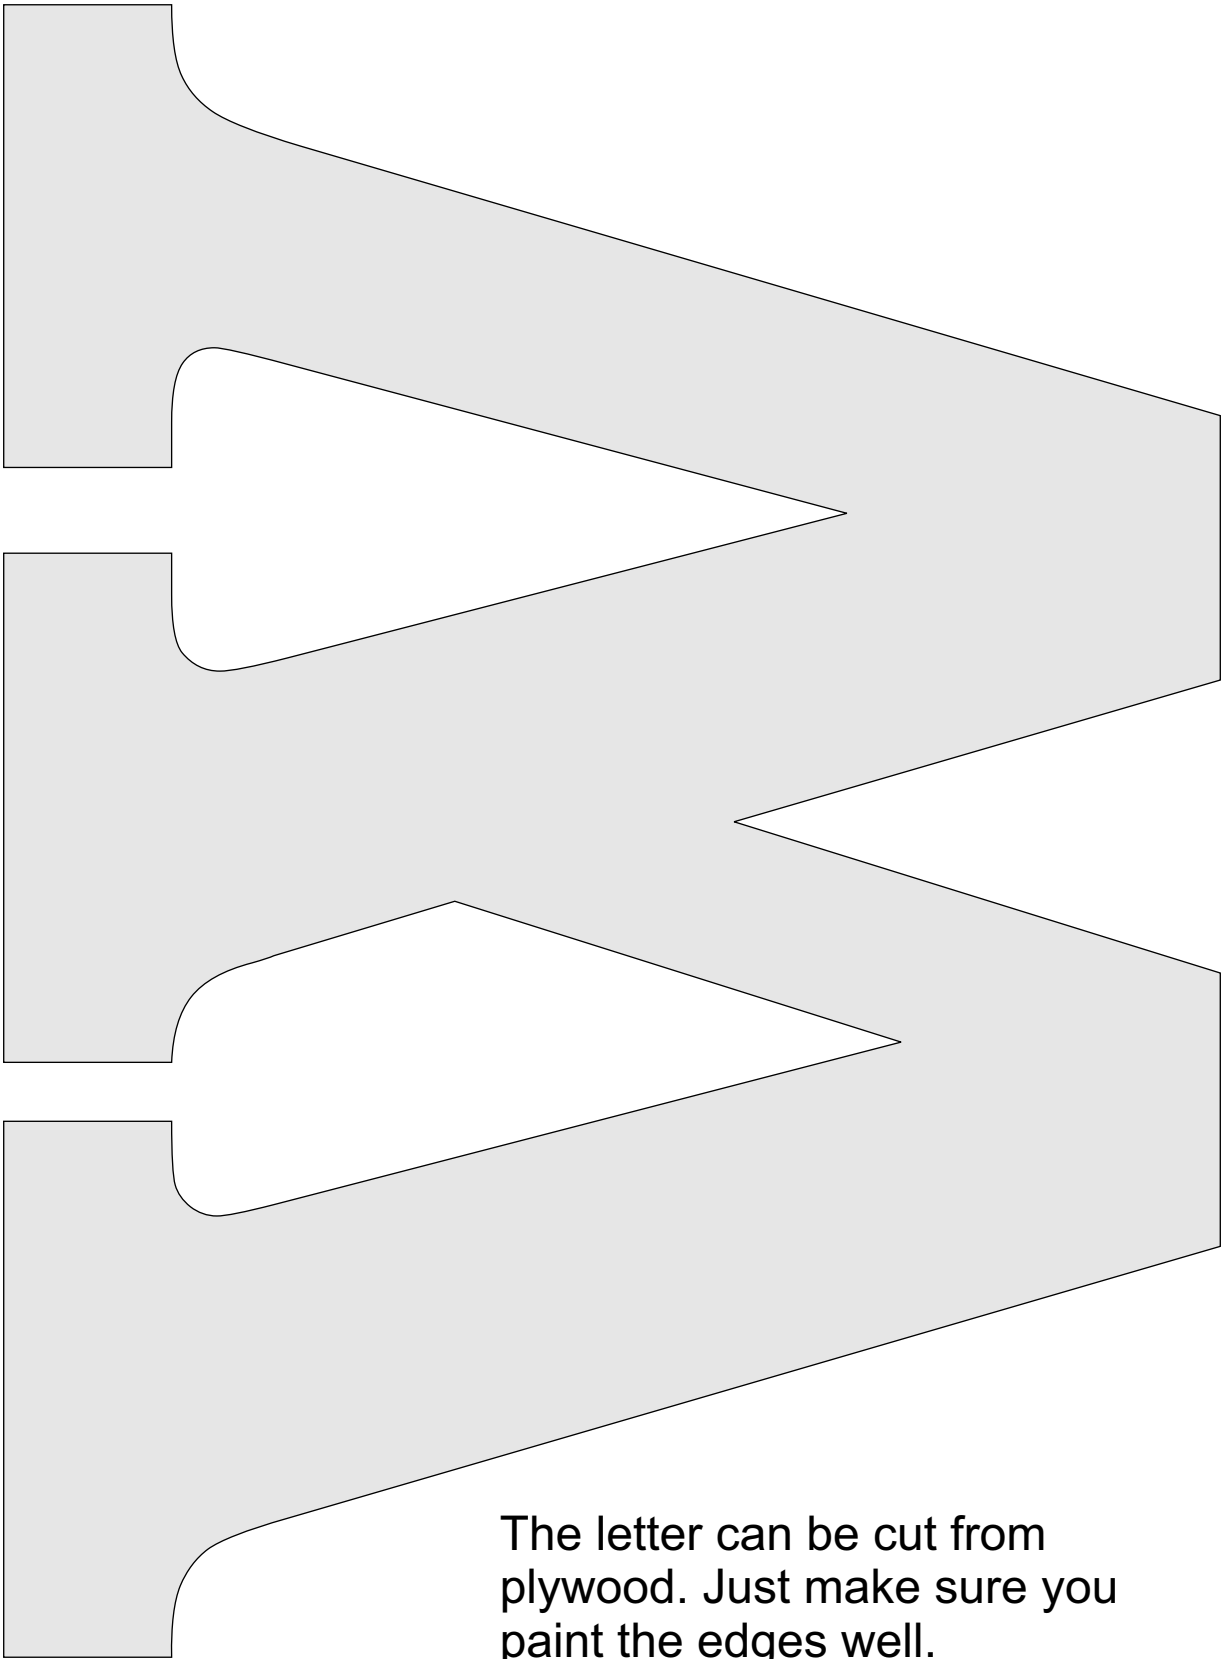

The letter can be cut from plywood. Just make sure you paint the edges well.

