## SCROLLSAW WORKSH

# Digital Patterns Designed by Steve Good








**Hundreds of free Patterns** Stencil Printer **Jigsaw Puzzle Templates** Key Chain Pattern Printer Video Tutorials Reviews Community Forum and more.

If you would like to donate click here. No Paypal account needed.





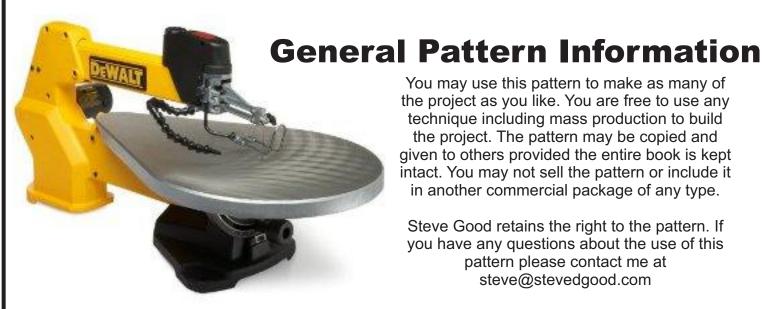

You may use this pattern to make as many of the project as you like. You are free to use any technique including mass production to build the project. The pattern may be copied and given to others provided the entire book is kept intact. You may not sell the pattern or include it in another commercial package of any type.


Steve Good retains the right to the pattern. If you have any questions about the use of this pattern please contact me at steve@stevedgood.com

When printing this pattern it is important to print it full size. When you bring up the print dialog box look in the "Page Sizing & Handling" section. Make sure the "Actual Size" is selected before you hit print.

You also only need to print the page/s you need. After the print dialog opens look for the "Pages to Print" section. You can print the current page or a range of pages. This will help save ink by not printing the title/instruction pages.

#### **Printing Instructions**



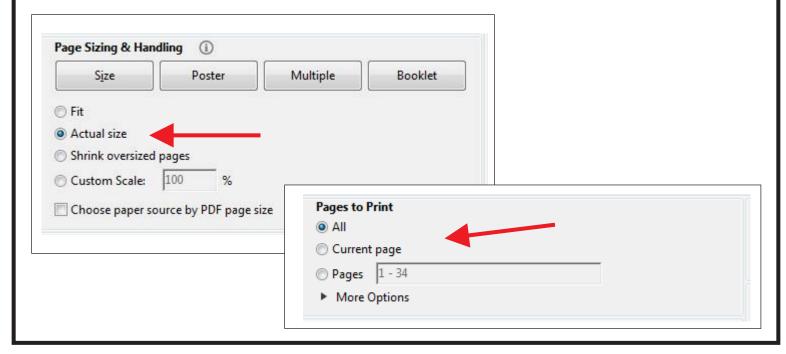


#### Yarn Box








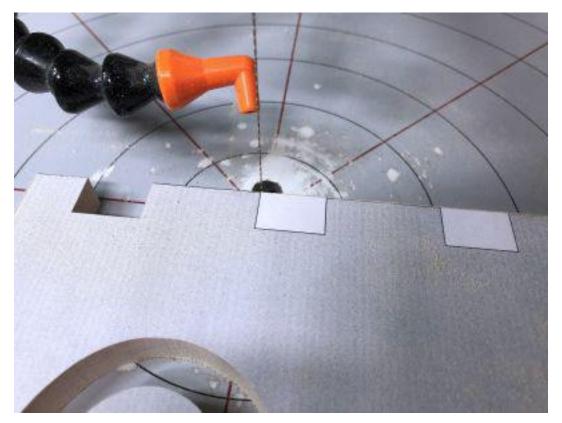

When you hand cut finger joints you want to get a good fit. The fit does not have to be machine perfect but we don't want it to look sloppy.


When you cut the opening cut just on the outside of the line trying to remove the line.

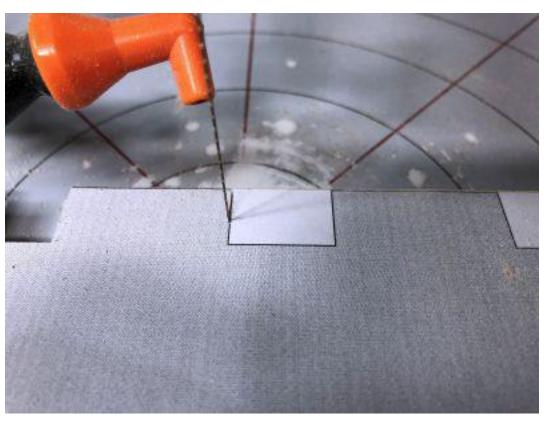




We do not want to turn the corner. We won't get a good square cut if we do. Make both cuts on the side of the opening then notch out a section.


Bring the blade into the corner and continue the cut across the bottom to get perfectly square corners.

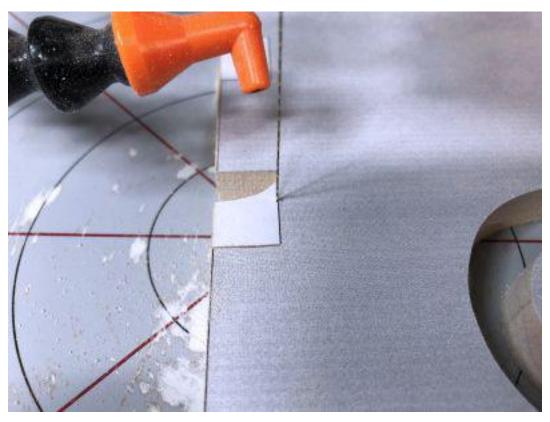


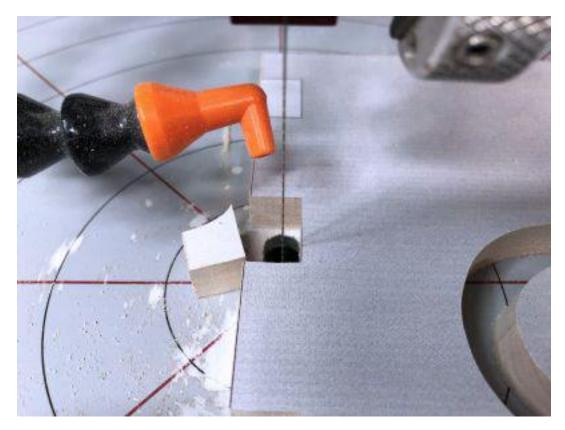

Cut all the openings for the finger joint.

We are now ready to cut the fingers. For this cut you want to try to split the pattern line. This should give you a good fit. Do not turn the corners. Back out of the cuts at the end of each line.

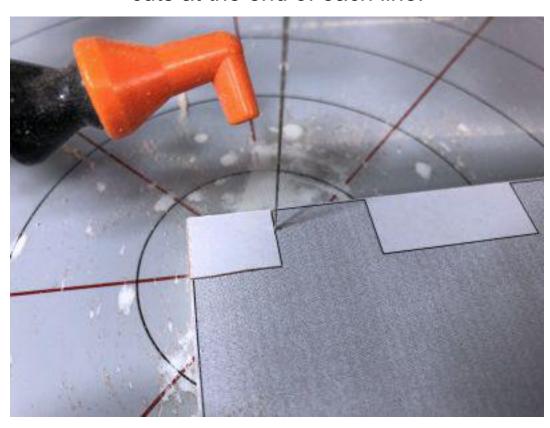


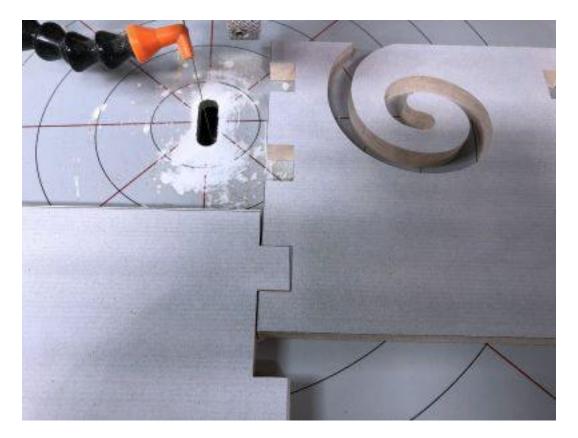



With accurate cutting you can get good fitting finger joints.


You want the fingers to be just a little long. You can easily sand the fingers flush. If the fingers are short you will have much more sanding to do.




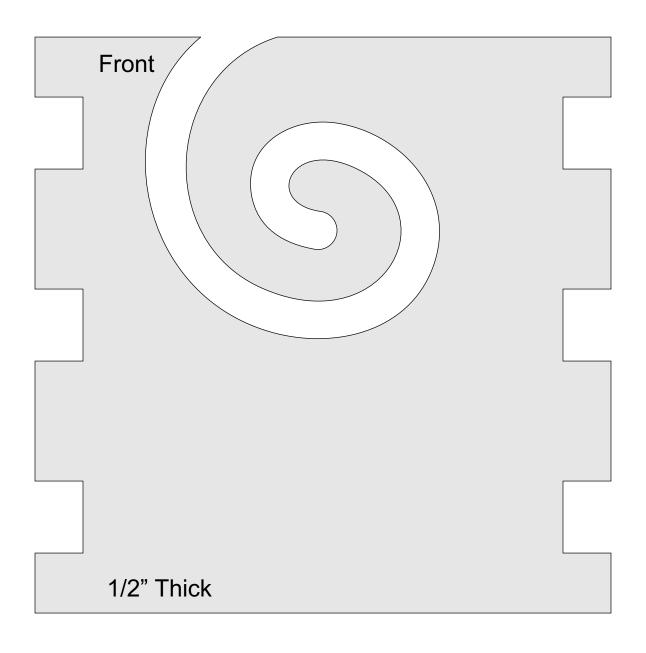

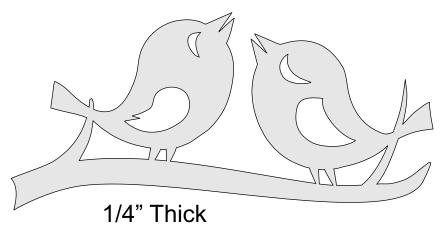

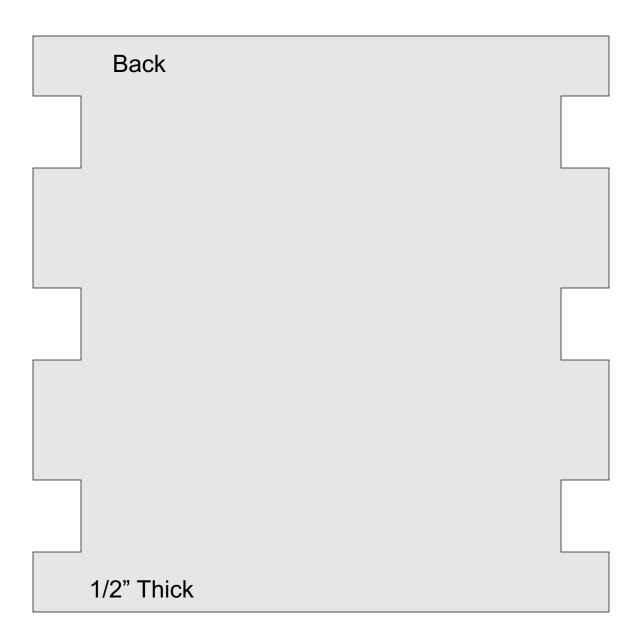

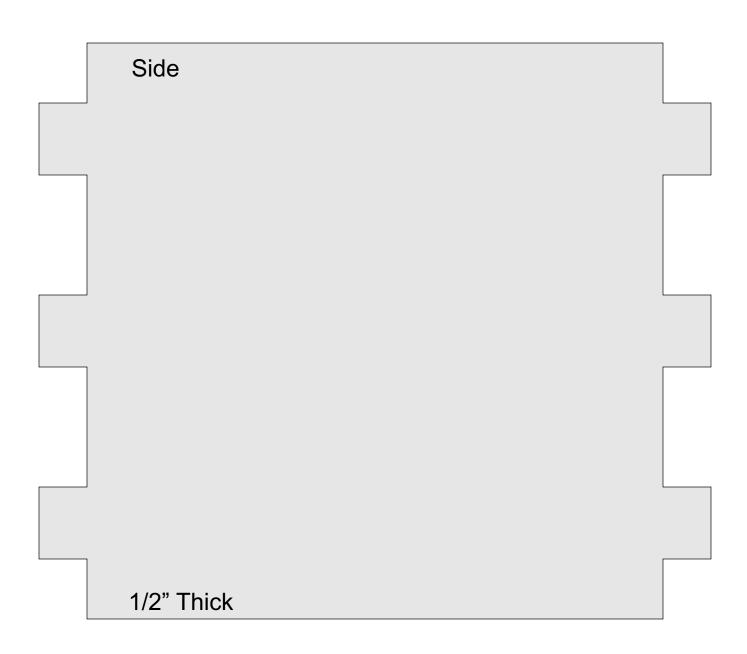

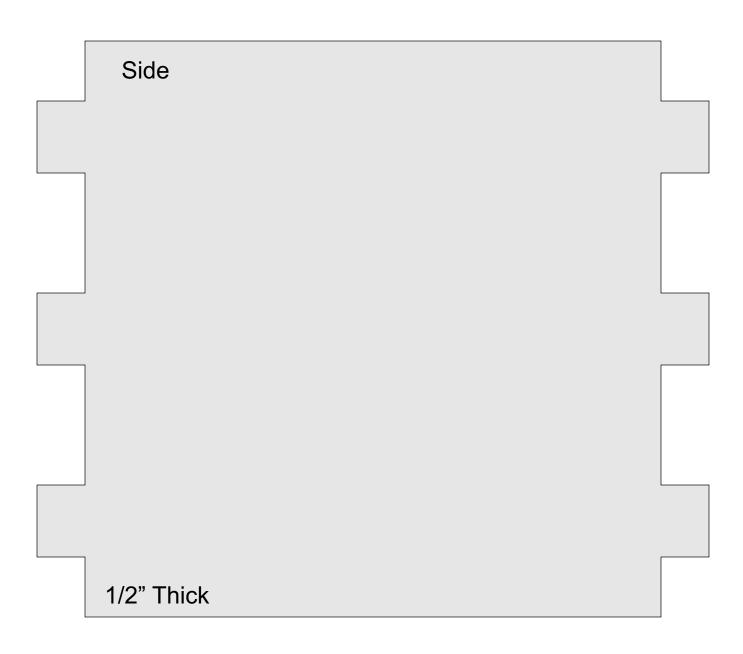

### If possible route a decorative profile on the bottom and the lid.

Bottom	
1/2" Thick	

Lid		
1/2" Thick		

Lid holder Glue to the bottom of the lid 1/4" Thick